

BEAMA 100 COB - PRO



- FEATURES:**
- Australian designed & manufactured professional recessed ultra-low glare recessed accent COB downlight with trim
 - Offers low glare for discrete lighting and beam control without compromising the LED light source.
 - Pinhole fixed or Adjustable 40°
 - Lumen options 980lm up to 1510lm / CRI 80 / CRI 90
 - Requires remote electronic driver.
 - Specify – Non-dim / Phase-cut dim / Dali dim
 - Dali dim 100% - 0.1% option available on request.
 - Casambi bluetooth wireless mesh control system available on request
 - Colour temps available: 2700k/3000k/4000k
 - Serviceable IP20 downlight
- Ideal for commercial / hospitality / retail / gallery / museum / residential applications

TRIM COLOURS:


■	Black	-2	Inner standard as Black
□	White	-3	
■	Silver	-6	
■	Custom	-5	

- ACCESSORIES:**
- Frosted glass 30mm (FG)
 - Deco colour glass 50mm (DG)
 - Honeycomb filter (AL20)

40 DEGREE

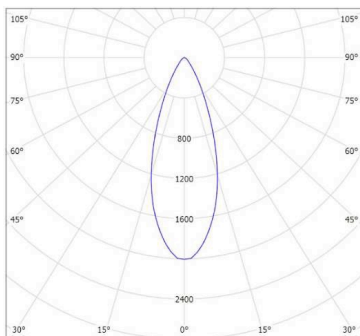

Adjustable



Fixed


CODE	TYPE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	mA	DIMENSIONS
BMR5013	Fixed - Pinhole	12.3	960	3000k	15, 24, 40	90	350	100mm x 97mm depth inc rear cover - 89mm cutout
BMR5023	Adjustable - Oval slot	12.3	960	3000k	15, 24, 40	90	350	100mm x 97mm depth inc rear cover - 89mm cutout

PROFESSIONAL


CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	MA
MC50-COB-900-927-15D-G1	12.3	980	2700k	15	90	350
MC50-COB-900-927-24D-G1	12.3	960	2700k	24	90	350
MC50-COB-900-927-40D-G1	12.3	920	2700k	40	90	350
MC50-COB-900-930-15D G1	12.3	1040	3000K	15	90	350
MC50-COB-900-930-24D G1	12.3	1020	3000K	24	90	350
MC50-COB-900-930-40D G1	12.3	980	3000K	40	90	350
MC50-COB-900-940-15D G1	12.3	1120	4000K	15	90	350
MC50-COB-900-940-24D G1	12.3	1090	4000K	24	90	350
MC50-COB-900-940-40D G1	12.3	1050	4000K	40	90	350
MC50-COB-1400-930-24D G1	12.9	1430	3000K	24	80	350
MC50-COB-1400-930-40D G1	12.9	1360	3000K	40	80	350
MC50-COB-1400-940-24D G1	12.9	1510	4000K	24	80	350
MC50-COB-1400-940-40D G1	12.9	1430	4000K	40	80	350

- Color consistency Mac Adam Step: 3 (<3SDCM)
- High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30


15 DEGREE



24 DEGREE



40 DEGREE

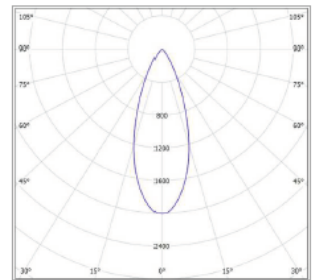

DRIVER OPTIONS:

- OTI / Dali dimmable
- OTE / PhaseCut
- OT / Non dimmable