

## BEAMA MINI DEEP COB – PRO

### FIXED



- FEATURES:**
- Australian designed & manufactured professional recessed ultra-low glare recessed accent COB downlight
  - Offers low glare for discrete lighting and beam control without compromising the LED light source.
  - Deep fixed pinhole 40mm recess
  - Lumen options 980lm up to 1510lm / CRI 80 / CRI 90
  - Requires remote electronic driver.
  - Specify – Non-dim / Phase-cut dim / Dali dim
  - Dali dim 100% - 0.1% option available on request.
  - Casambi bluetooth wireless mesh control system available on request
  - Colour temps available: 2700k/3000k/4000k
  - Serviceable IP20 downlight
  - Ideal for commercial / hospitality / retail / gallery / museum / residential applications

**TRIM COLOURS:**

|        |    |                         |
|--------|----|-------------------------|
| Black  | -2 | Inner standard as Black |
| White  | -3 |                         |
| Silver | -6 |                         |
| Custom | -5 |                         |

- ACCESSORIES:**
- Frosted glass 30mm (FG)
  - Deco colour glass 50mm (DG)
  - Honeycomb filter (AL20)
  - Semi surface mounted round trim (MNBA003 - Colour)

### 40 DEGREE

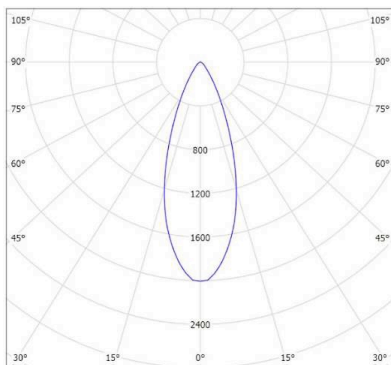


| CODE      | LAMP TYPE | WATTAGE | LUMENS | COLOUR TEMP | BEAM ANGLE | CRI | mA  | DIMENSIONS                     |
|-----------|-----------|---------|--------|-------------|------------|-----|-----|--------------------------------|
| BMM-fixed | COB       | 12.3    | 960    | 3000k       | 15, 24, 40 | 90  | 350 | 90mm x 90mm high - 79mm cutout |

**PROFESSIONAL**


| CODE                     | WATTAGE | LUMENS | COLOUR TEMP | BEAM ANGLE | CRI | MA  |
|--------------------------|---------|--------|-------------|------------|-----|-----|
| MC50-COB-900-927-15D-G1  | 12.3    | 980    | 2700k       | 15         | 90  | 350 |
| MC50-COB-900-927-24D-G1  | 12.3    | 960    | 2700k       | 24         | 90  | 350 |
| MC50-COB-900-927-40D-G1  | 12.3    | 920    | 2700k       | 40         | 90  | 350 |
| MC50-COB-900-930-15D G1  | 12.3    | 1040   | 3000K       | 15         | 90  | 350 |
| MC50-COB-900-930-24D G1  | 12.3    | 1020   | 3000K       | 24         | 90  | 350 |
| MC50-COB-900-930-40D G1  | 12.3    | 980    | 3000K       | 40         | 90  | 350 |
| MC50-COB-900-940-15D G1  | 12.3    | 1120   | 4000K       | 15         | 90  | 350 |
| MC50-COB-900-940-24D G1  | 12.3    | 1090   | 4000K       | 24         | 90  | 350 |
| MC50-COB-900-940-40D G1  | 12.3    | 1050   | 4000K       | 40         | 90  | 350 |
| MC50-COB-1400-930-24D G1 | 12.9    | 1430   | 3000K       | 24         | 80  | 350 |
| MC50-COB-1400-930-40D G1 | 12.9    | 1360   | 3000K       | 40         | 80  | 350 |
| MC50-COB-1400-940-24D G1 | 12.9    | 1510   | 4000K       | 24         | 80  | 350 |
| MC50-COB-1400-940-40D G1 | 12.9    | 1430   | 4000K       | 40         | 80  | 350 |

- Color consistency Mac Adam Step: 3 (<3SDCM)
- High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30


**15 DEGREE**

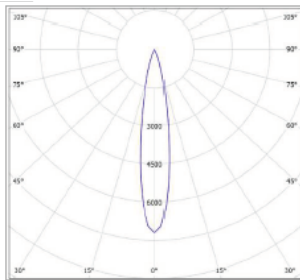

**24 DEGREE**

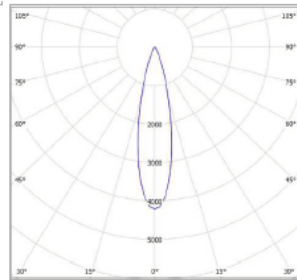

**40 DEGREE**

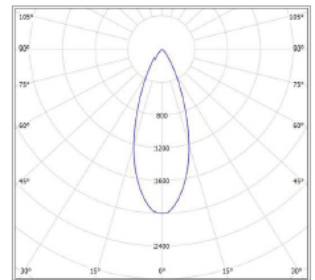

**DRIVER OPTIONS:**

- OTI / Dali dimmable
- OTE / PhaseCut
- OT / Non dimmable