





**MONDO RADIUS 111 COB SNOOT - PRO**

**FEATURES:**

- Australian designed & manufactured professional large recessed low glare accent LED downlight
- Adjustable 40° tilt , 359° rotation
- Lumen options 1800 up to 4780lm / CRI 80 / CRI 90
- Requires remote electronic driver.
- Specify - Non dim / Phase-cut dim / Dali dim
- Dali - Smart phone blue tooth connectivity available on request
- Dali dim 100% - 0.1% option available on request
- Casambi Bluetooth wireless mesh control system available on request
- Colour temps available: 2700k/3000k/4000k
- Serviceable IP20 downlight
- Ideal for commercial / hospitality / retail / gallery / museum / residential applications
- IES files available on request

**TRIM**



**COLOURS:**

-  Black -2 Inner standard as Black
-  White -3
-  White -3-3
-  Silver -6
- Custom -5

**ACCESSORIES:**

- Deco glass filter holder (CHL)
- Frosted glass 30mm (FG)
- Deco colour glass 50mm (DG)
- AL 20 HoneyComb filter

**40 DEGREE**

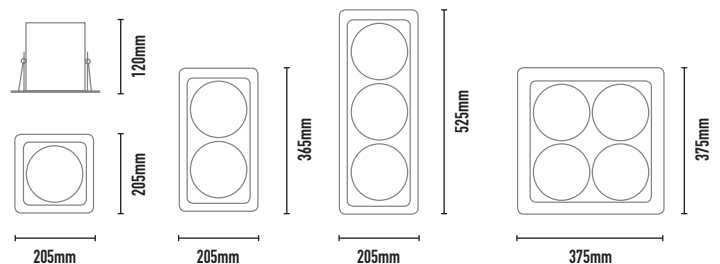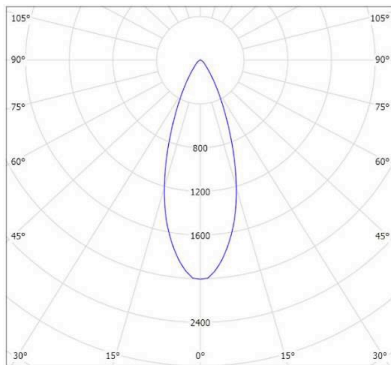


CODE	LAMP TYPE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	mA	DIMENSIONS
RAD611-SNOOT	COB	1x 18	1800	3000K	15,24,40	90	500	UNO 205mm x 205mm x 120mm depth cutout - 190mm x 190mm
RAD612-SNOOT	COB	2x 18	3600	3000K	15,24,40	90	500	DUO 205mm x 365mm x 120mm depth cutout -190mm x 335mm
RAD613-SNOOT	COB	3x 18	5400	3000K	15,24,40	90	500	TRIO 205mm x 525mm x 120mm depth cutout - 190mm x 495mm
RAD615-SNOOT	COB	4x 18	7200	3000K	15,24,40	90	500	QUATRO SQ 375mm x 375mm x 120mm depth cutout - 360mm x 360mm

**PROFESSIONAL**


CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	MA
MC111-COB-1800-927-15D-G1	18	1730	2700	15	90	500
MC111-COB-1800-927-24D-G1	18	1770	2700	24	90	500
MC111-COB-1800-927-40D-G1	18	1770	2700	40	90	500
MC111-COB-1800-930-15D-G1	18	1840	3000	15	90	500
MC111-COB-1800-930-24D-G1	18	1880	3000	24	90	500
MC111-COB-1800-930-40D-G1	18	1800	3000	40	90	500
MC111-COB-1800-940-15D-G1	18	1940	4000	15	90	500
MC111-COB-1800-940-24D-G1	18	1990	4000	24	90	500
MC111-COB-1800-940-40D-G1	18	1910	4000	40	80	500
MC111-COB-2800-830-15D-G1	25.9	2700	3000	15	80	700
MC111-COB-2800-830-24D-G1	25.9	2760	3000	24	80	700
MC111-COB-2800-830-40D-G1	25.9	2650	3000	40	80	700
MC111-COB-2800-840-15D-G1	25.9	2830	4000	15	80	700
MC111-COB-2800-840-24D-G1	25.9	2900	4000	24	80	700
MC111-COB-2800-840-40D-G1	25.9	2780	4000	40	80	700
MC111-COB-4300-830-24D-G1	37.6	4550	3000	24	80	1050
MC111-COB-4300-830-40D-G1	37.6	4340	3000	40	80	1050
MC111-COB-4300-830-60D-G1	37.6	4240	3000	60	80	1050
MC111-COB-4300-840-24D-G1	37.6	4780	4000	24	80	1050
MC111-COB-4300-840-40D-G1	37.6	4560	4000	40	80	1050
MC111-COB-4300-840-60D-G1	37.6	4450	4000	60	80	1050

- Color consistency Mac Adam Step: 3 (<3SDCM)
- High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30


**15 DEGREE**



**24 DEGREE**



**40 DEGREE**



**DRIVER OPTIONS:**

- OTI / Dali dimmable
- OTE / PhaseCut
- OT / Non dimmable

[www.massonforlight.com.au](http://www.massonforlight.com.au)

email: [sales@massonforlight.com.au](mailto:sales@massonforlight.com.au)

\* Masson For Light reserves the right to make dimensional, design and technical alterations without prior notice.