


MONDO RADIUS COB SNOOT - PRO

- FEATURES:**
- Australian designed & manufactured professional recessed low glare accent LED downlight
 - Adjustable 45° tilt, 359° rotation
 - Lumen options 980lm up to 1510lm / CRI 80 / CRI 90
 - Requires remote electronic driver.
 - Specify - Non dim / Phase-cut dim / Dali dim
 - Dali - Smart phone blue tooth connectivity available on request
 - Dali dim 100% - 0.1% option available on request
 - Casambi Bluetooth wireless mesh control system available on request
 - Colour temps available: 2700k/3000k/4000k/6500k
 - Serviceable IP20 downlight
 - Ideal for commercial / hospitality / retail / gallery / museum / residential / applications
 - IES files available on request


TRIM COLOURS:

	Black	-2	Inner standard as Black
	White	-3	
	White	-3-3	
	Silver	-6	
	Custom	-5	

- ACCESSORIES:**
- Deco glass filter holder (CHL)
 - Frosted glass 30mm (FG)
 - Deco colour glass 50mm (DG)
 - AL 20 HoneyComb filter

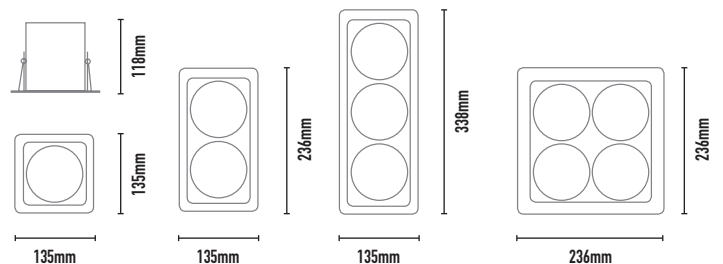

40 DEGREE

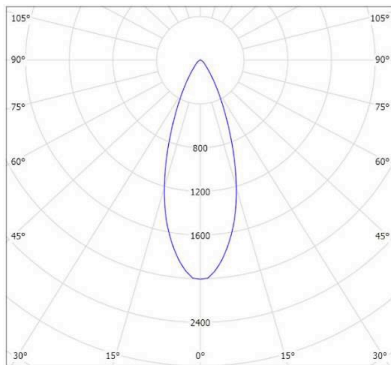


CODE	LAMP TYPE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	mA	DIMENSIONS
RAD501 -SNOOT	COB	1x 12.3	980	3000K	15,24,40	90	350	UNO 135mm x 135mm x 118mm height cutout - 126mm x 110mm
RAD502 -SNOOT	COB	2x 12.3	1960	3000K	15,24,40	90	350	DUO 135mm x 236mm x 118mm height cutout - 126mm x 210mm
RAD503 -SNOOT	COB	3x 12.3	2940	3000K	15,24,40	90	350	TRIO 135mm x 338mm x 118mm height cutout - 126mm x 310mm
RAD505 -SNOOT	COB	4x 12.3	3920	3000K	15,24,40	90	350	QUATRO SQ 236mm x 236mm x 118mm height cutout - 228mm x 215mm

PROFESSIONAL


CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	MA
MC50-COB-900-927-15D-G1	12.3	980	2700k	15	90	350
MC50-COB-900-927-24D-G1	12.3	960	2700k	24	90	350
MC50-COB-900-927-40D-G1	12.3	920	2700k	40	90	350
MC50-COB-900-930-15D G1	12.3	1040	3000K	15	90	350
MC50-COB-900-930-24D G1	12.3	1020	3000K	24	90	350
MC50-COB-900-930-40D G1	12.3	980	3000K	40	90	350
MC50-COB-900-940-15D G1	12.3	1120	4000K	15	90	350
MC50-COB-900-940-24D G1	12.3	1090	4000K	24	90	350
MC50-COB-900-940-40D G1	12.3	1050	4000K	40	90	350
MC50-COB-1400-930-24D G1	12.9	1430	3000K	24	80	350
MC50-COB-1400-930-40D G1	12.9	1360	3000K	40	80	350
MC50-COB-1400-940-24D G1	12.9	1510	4000K	24	80	350
MC50-COB-1400-940-40D G1	12.9	1430	4000K	40	80	350

- Color consistency Mac Adam Step: 3 (<3SDCM)
- High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30


15 DEGREE



24 DEGREE



40 DEGREE



DRIVER OPTIONS:

- OTI / Dali dimmable
- OTE / PhaseCut
- OT / Non dimmable