

APOLLO COB - PRO

- FEATURES:**
- Australian designed & manufactured professional low glare accent COB spot light
 - Adjustable 90° tilt, 359° swivel
 - Suitable for **3C** track or with a variety of **surface mounted options**
 - Lumen options 980lm up to 1510lm / CRI 80 / CRI 90
 - Requires remote electronic driver
 - Track specify Non-dim / Dali dim / Casambi
 - For **Surface mounted options** specify Non-dim/ Phase-cut dim / Dali dim / Casambi
 - Dali - Smart phone Bluetooth connectivity available on request
 - Dali dim 100% - 0.1% option available on request
 - Casambi Bluetooth wireless mesh control system available on request
 - Serviceable IP20 spotlight
 - Colour temps available: 2700k/ 3000k / 4000k
 - Ideal for commercial / hospitality / retail / gallery / museum / residential applications
 - IES files available on request.

- COLOURS:**
- Black -2
 - White -3
 - ▣ White outer / Black inner -3-2
 - Silver -6
 - Custom -5


- ACCESSORIES:**
- Deco glass filter holder (CHL)
 - Frosted glass 30mm (FG)
 - Deco colour glass 50mm (DG)
 - AL 20 honeycomb filter
 - Lamp droppers 100mm -1500mm (LD)
 - Mited snoot/ 140mm UP (TBC)
 - Mited snoot/140mm Down (TBC)

MOUNTING OPTIONS:


- Additional mounting options available
- See **Mounting Options** spec sheet for more information




40 DEGREE



CP80

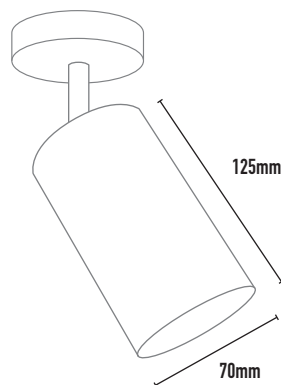

CD65




| CODE | LAMP TYPE | WATTAGE | LUMENS | COLOUR TEMP | BEAM ANGLE | CRI | mA | DIMENSIONS |
|--------|-----------|---------|--------|-------------|------------|-----|-----|------------------------------|
| APL501 | COB | 12.3 | 980 | 3000K | 15,24,40 | 90 | 350 | 110mm length x 70mm diameter |
| APL502 | COB | 12.3 | 980 | 3000K | 15,24,40 | 90 | 350 | 125mm length x 70mm diameter |

PROFESSIONAL


| CODE | WATTAGE | LUMENS | COLOUR TEMP | BEAM ANGLE | CRI | MA |
|--------------------------|---------|--------|-------------|------------|-----|-----|
| MC50-COB-900-927-15D-G1 | 12.3 | 980 | 2700k | 15 | 90 | 350 |
| MC50-COB-900-927-24D-G1 | 12.3 | 960 | 2700k | 24 | 90 | 350 |
| MC50-COB-900-927-40D-G1 | 12.3 | 920 | 2700k | 40 | 90 | 350 |
| MC50-COB-900-930-15D G1 | 12.3 | 1040 | 3000K | 15 | 90 | 350 |
| MC50-COB-900-930-24D G1 | 12.3 | 1020 | 3000K | 24 | 90 | 350 |
| MC50-COB-900-930-40D G1 | 12.3 | 980 | 3000K | 40 | 90 | 350 |
| MC50-COB-900-940-15D G1 | 12.3 | 1120 | 4000K | 15 | 90 | 350 |
| MC50-COB-900-940-24D G1 | 12.3 | 1090 | 4000K | 24 | 90 | 350 |
| MC50-COB-900-940-40D G1 | 12.3 | 1050 | 4000K | 40 | 90 | 350 |
| MC50-COB-1400-930-24D G1 | 12.9 | 1430 | 3000K | 24 | 80 | 350 |
| MC50-COB-1400-930-40D G1 | 12.9 | 1360 | 3000K | 40 | 80 | 350 |
| MC50-COB-1400-940-24D G1 | 12.9 | 1510 | 4000K | 24 | 80 | 350 |
| MC50-COB-1400-940-40D G1 | 12.9 | 1430 | 4000K | 40 | 80 | 350 |

- Color consistency Mac Adam Step: 3 (<3SDCM)
- High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30


15 DEGREE

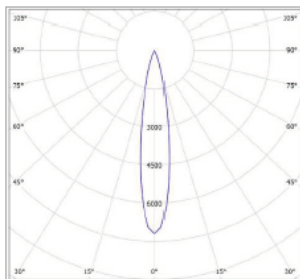

24 DEGREE

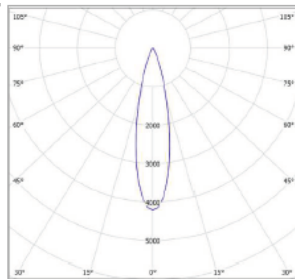

40 DEGREE

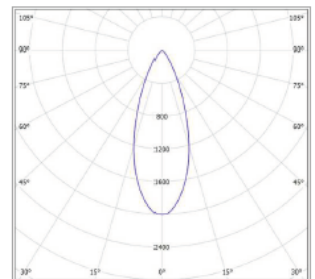

DRIVER OPTIONS:

- OTI / Dali dimmable
- OTE / PhaseCut
- OT / Non dimmable