



BEAMA MAXI 111 COB - PRO

- FEATURES:**
- Australian designed & manufactured professional surface mounted low glare accent large format downlight
 - Adjustable 45° tilt, 359° rotation
 - Lumen options 1800 up to 4780/ CRI 80 / 90
 - Integral electronic driver
 - Specify - Non dim / Phase-cut dim / Dali dim
 - Dali dim 100% - 0.1% option available on request
 - Corridor functionality, daylight harvesting - touch Dim available with Dali
 - Dali - Smart phone blue tooth connectivity available on request
 - Casambi Bluetooth wireless mesh control system available on request
 - 12v versions available
 - Serviceable IP20 downlight
 - Colour temps available: 2700k/3000k/4000k
 - Ideal for commercial / hospitality / retail / gallery / museum & residential applications
 - IES files available on request

- COLOURS:**
- Black -2
 - White -3
 - Silver -6
 - Custom -5

- ACCESSORIES:**
- Frosted glass 50mm (FG111)
 - Deco colour glass 50mm (DG)
 - Honeycomb filter (AL 20)

40 DEGREE BEAM ANGLE AS PER
STANDARD SPEC OPTIONS BELOW.

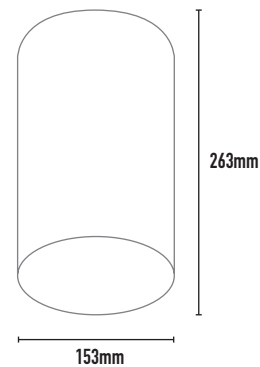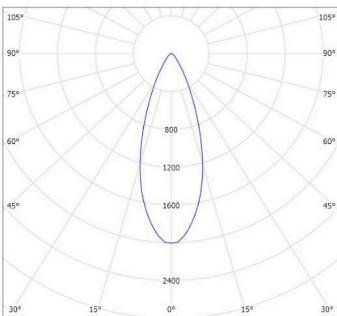

CODE	LAMP TYPE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	mA	DIMENSIONS
BMX613	COB	18	1800	3000K	15,24,40	90	500	263mm x 153mm


PROFESSIONAL

TO SPECIFY ADDITIONAL LED MODULE, "LAMP" OPTIONS: PLEASE SELECT FROM THE CODES BELOW AND ADD TO THE SPECIFICATION


CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	MA
MC111-COB-1800-927-15D-G1	18	1730	2700	15	90	500
MC111-COB-1800-927-24D-G1	18	1770	2700	24	90	500
MC111-COB-1800-927-40D-G1	18	1770	2700	40	90	500
MC111-COB-1800-930-15D-G1	18	1840	3000	15	90	500
MC111-COB-1800-930-24D-G1	18	1880	3000	24	90	500
MC111-COB-1800-930-40D-G1	18	1800	3000	40	90	500
MC111-COB-1800-940-15D-G1	18	1940	4000	15	90	500
MC111-COB-1800-940-24D-G1	18	1990	4000	24	90	500
MC111-COB-1800-940-40D-G1	18	1910	4000	40	80	500
MC111-COB-2800-830-15D-G1	25.9	2700	3000	15	80	700
MC111-COB-2800-830-24D-G1	25.9	2760	3000	24	80	700
MC111-COB-2800-830-40D-G1	25.9	2650	3000	40	80	700
MC111-COB-2800-840-15D-G1	25.9	2830	4000	15	80	700
MC111-COB-2800-840-24D-G1	25.9	2900	4000	24	80	700
MC111-COB-2800-840-40D-G1	25.9	2780	4000	40	80	700
MC111-COB-4300-830-24D-G1	37.6	4550	3000	24	80	1050
MC111-COB-4300-830-40D-G1	37.6	4340	3000	40	80	1050
MC111-COB-4300-830-60D-G1	37.6	4240	3000	60	80	1050
MC111-COB-4300-840-24D-G1	37.6	4780	4000	24	80	1050
MC111-COB-4300-840-40D-G1	37.6	4560	4000	40	80	1050
MC111-COB-4300-840-60D-G1	37.6	4450	4000	60	80	1050

- Color consistency Mac Adam Step: 3 (<3SDCM)
- High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30


15 DEGREE



24 DEGREE



40 DEGREE



DRIVER OPTIONS:

- OTI / Dali dimmable
- OTE / PhaseCut
- OT / Non dimmable