





## ARENA GALLERY SPOT COB - PRO


- FEATURES:**
- Australian designed & manufactured professional ultra low glare accent COB spot light
  - Deep 35mm baffle
  - Adjustable 180° tilt, 359° swivel
  - Suitable for **3C** track or with a variety of **surface mounted options**
  - Lumen options 980lm up to 1510lm / CRI 80 / CRI 90
  - Integral electronic driver
  - Specify: Non-dim / Phase-cut dim /Dali dim / Casambi
  - Dali - Smart phone Bluetooth connectivity available on request
  - Dali dim 100% - 0.1% option available on request
  - Casambi Bluetooth wireless mesh control system available on request
  - Serviceable IP20 spotlight
  - Colour temps available: 2700k/ 3000k / 4000k
  - Ideal for commercial / hospitality / retail / gallery / museum / residential applications
  - IES files available on request.

**COLOURS:**


	Black	-2
	White	-3
	White outer / Black inner	-3-2
	Silver	-6
	Custom	-5

- ACCESSORIES:**
- Deco glass filter holder (CHL)
  - Deco colour glass 50mm (DG)
  - Honeycomb filter (AL20)
  - BD Barndoors specify colour (BD)
  - Lamp droppers 100mm -1500mm (LD)

- MOUNTING OPTIONS:**
- CP80 / CD65 / 3C track

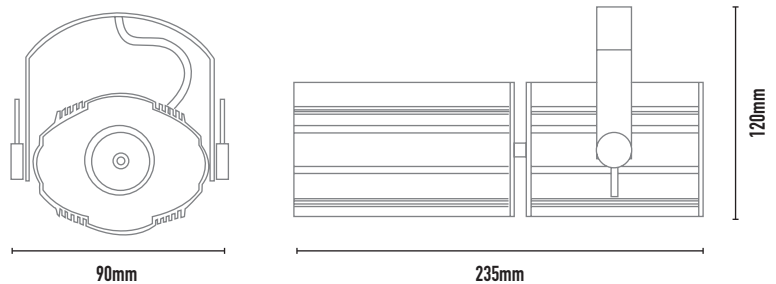

40 DEGREE BEAM ANGLE AS  
STANDARD SPEC OPTIONS BELOW

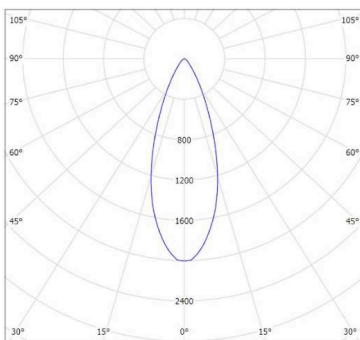

CODE	LAMP TYPE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	mA	DIMENSIONS
ARS506	COB	12.3	980	3000K	15,24,40	90	350	235mm x 120mm x 90mm
								Nom Dimming options


**PROFESSIONAL**

TO SPECIFY ADDITIONAL LED MODULE, "LAMP" OPTIONS: PLEASE SELECT FROM THE CODES BELOW AND ADD TO THE SPECIFICATION


CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	MA
MC50-COB-900-927-15D-G1	12.3	980	2700k	15	90	350
MC50-COB-900-927-24D-G1	12.3	960	2700k	24	90	350
MC50-COB-900-927-40D-G1	12.3	920	2700k	40	90	350
MC50-COB-900-930-15D G1	12.3	1040	3000K	15	90	350
MC50-COB-900-930-24D G1	12.3	1020	3000K	24	90	350
MC50-COB-900-930-40D G1	12.3	980	3000K	40	90	350
MC50-COB-900-940-15D G1	12.3	1120	4000K	15	90	350
MC50-COB-900-940-24D G1	12.3	1090	4000K	24	90	350
MC50-COB-900-940-40D G1	12.3	1050	4000K	40	90	350
MC50-COB-1400-930-24D G1	12.9	1430	3000K	24	80	350
MC50-COB-1400-930-40D G1	12.9	1360	3000K	40	80	350
MC50-COB-1400-940-24D G1	12.9	1510	4000K	24	80	350
MC50-COB-1400-940-40D G1	12.9	1430	4000K	40	80	350

- Color consistency Mac Adam Step: 3 (<3SDCM)
- High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30


**15 DEGREE**

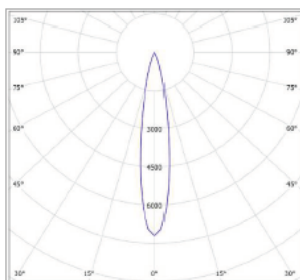

**24 DEGREE**

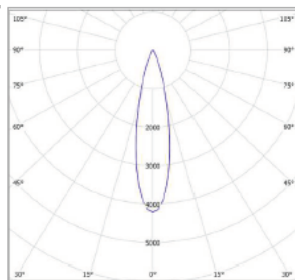

**40 DEGREE**

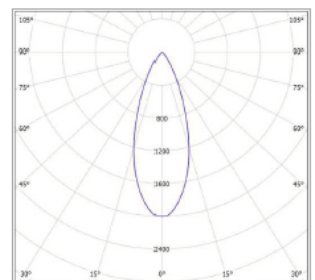

**DRIVER OPTIONS:**

- OTI / Dali dimmable
- OTE / PhaseCut
- OT / Non dimmable