









INDIE JUMBO 111 COB - PRO

- FEATURES:**
- Australian designed & manufactured professional low glare accent large format track or surface mounted spot
 - Extruded aluminium body
 - Adjustable 45° tilt, 359° rotation
 - Lumen options 1800 up to 4780/ CRI 80 / 90
 - Remote electronic driver
 - Suitable for 3C track or with a variety of surface mounted options
 - Requires remote electronic driver
 - 3C track mount max 2650lm
 - Track specify Non-dim / Dali dim / Casambi
 - For Surface mounted options specify Non-dim/ Phase-cut dim / Dali dim / Casambi
 - Corridor functionality, daylight harvesting - touch Dim available with Dali
 - Dali - Smart phone blue tooth connectivity available on request
 - Casambi Bluetooth wireless mesh control system available on request
 - Colour temps available: 2700k/3000k/4000k
 - Serviceable IP20 spotlight
 - Ideal for commercial / hospitality / retail / gallery / museum & residential applications
 - IES files available on request


COLOURS:

	Black	-2
	White	-3
	White outer/Black inner	-3 -2
	Silver	-6
	Custom	-5

40 DEGREE AS STANDARD

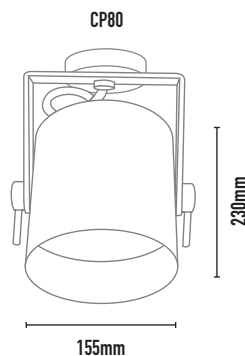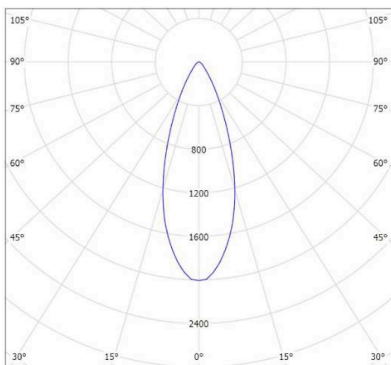

- ACCESSORIES:**
- Frosted glass 30mm (FG)
 - Deco colour glass 50mm (DG)
 - Honeycomb filter (AL111)



MOUNTING OPTIONS:

- CP80 / 3C track
- Additional mounting options available
- See [Mounting Options](#) spec sheet for more information

CODE	LAMP TYPE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	DIMENSIONS
IND6234	COB	1x26W	2650	3000K	12,25,40	90	230mm height x 155mm diameter


PROFESSIONAL

TO SPECIFY ADDITIONAL LED MODULE, "LAMP" OPTIONS: PLEASE SELECT FROM THE CODES BELOW AND ADD TO THE SPECIFICATION


CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	MA
MC111-COB-1800-927-15D-G1	18	1730	2700	15	90	500
MC111-COB-1800-927-24D-G1	18	1770	2700	24	90	500
MC111-COB-1800-927-40D-G1	18	1770	2700	40	90	500
MC111-COB-1800-930-15D-G1	18	1840	3000	15	90	500
MC111-COB-1800-930-24D-G1	18	1880	3000	24	90	500
MC111-COB-1800-930-40D-G1	18	1800	3000	40	90	500
MC111-COB-1800-940-15D-G1	18	1940	4000	15	90	500
MC111-COB-1800-940-24D-G1	18	1990	4000	24	90	500
MC111-COB-1800-940-40D-G1	18	1910	4000	40	80	500
MC111-COB-2800-830-15D-G1	25.9	2700	3000	15	80	700
MC111-COB-2800-830-24D-G1	25.9	2760	3000	24	80	700
MC111-COB-2800-830-40D-G1	25.9	2650	3000	40	80	700
MC111-COB-2800-840-15D-G1	25.9	2830	4000	15	80	700
MC111-COB-2800-840-24D-G1	25.9	2900	4000	24	80	700
MC111-COB-2800-840-40D-G1	25.9	2780	4000	40	80	700
MC111-COB-4300-830-24D-G1	37.6	4550	3000	24	80	1050
MC111-COB-4300-830-40D-G1	37.6	4340	3000	40	80	1050
MC111-COB-4300-830-60D-G1	37.6	4240	3000	60	80	1050
MC111-COB-4300-840-24D-G1	37.6	4780	4000	24	80	1050
MC111-COB-4300-840-40D-G1	37.6	4560	4000	40	80	1050
MC111-COB-4300-840-60D-G1	37.6	4450	4000	60	80	1050

- Color consistency Mac Adam Step: 3 (<3SDCM)
- High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30


15 DEGREE



24 DEGREE



40 DEGREE



DRIVER OPTIONS:

- OTI / Dali dimmable
- OTE / PhaseCut
- OT / Non dimmable