
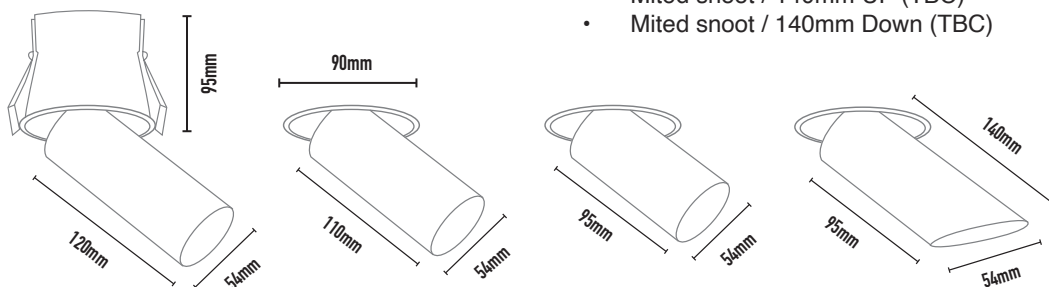


TULLYSPOT W/W COB - PRO

- FEATURES:**
- Australian designed & manufactured professional low glare accent COB wall washer spot light
 - Adjustable 80° to 50° tilt, 359° swivel
 - Lumen options 980lm up to 1510lm/CRI 80/CRI 90
 - Requires remote electronic driver
 - Specify Non-dim/Phase-cut dim/Dali dim/Casambi
 - Dali - Smart phone Bluetooth connectivity available on request
 - Dali dim 100% - 0.1% option available on request.
 - Casambi Bluetooth wireless mesh control system available on request
 - Serviceable IP20 spotlight
 - Colour temps available: 2700k / 3000k / 4000k
 - Ideal for commercial / hospitality / retail / gallery / museum / residential applications
 - IES files available on request.

COLOURS:		Black	-2
		White	-3
		Snoot White outer / Black inner	-1
		Silver	-6
		Custom	-9

40 DEGREE BEAM ANGLE AS STANDARD SPEC OPTIONS BELOW



ACCESSORIES:

- Deco glass filter holder (CHL)
- Frosted glass 30mm (FG)
- Deco colour glass 50mm (DG)
- Honeycomb filter (AL20)
- Mited snoot / 140mm UP (TBC)
- Mited snoot / 140mm Down (TBC)

CODE	LAMP TYPE	WATTAGE	LUMENS	COLOUR TEMP	BEAM°	CRI	mA	DIMENSIONS
TDW500	COB	12.3	980	3000K	15,24,40	90	350	95mm length x 54mm diameter - 83mm diameter cutout
TDW501	COB	12.3	980	3000K	15,24,40	90	350	110mm length x 54mm diameter - 83mm diameter cutout
TDW502	COB	12.3	980	3000K	15,24,40	90	350	120mm length x 54mm diameter - 83mm diameter cutout


PROFESSIONAL

TO SPECIFY ADDITIONAL LED MODULE, "LAMP" OPTIONS: PLEASE SELECT FROM THE CODES BELOW AND ADD TO THE SPECIFICATION


CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	MA
MC50-COB-900-927-15D-G1	12.3	980	2700k	15	90	350
MC50-COB-900-927-24D-G1	12.3	960	2700k	24	90	350
MC50-COB-900-927-40D-G1	12.3	920	2700k	40	90	350
MC50-COB-900-930-15D G1	12.3	1040	3000K	15	90	350
MC50-COB-900-930-24D G1	12.3	1020	3000K	24	90	350
MC50-COB-900-930-40D G1	12.3	980	3000K	40	90	350
MC50-COB-900-940-15D G1	12.3	1120	4000K	15	90	350
MC50-COB-900-940-24D G1	12.3	1090	4000K	24	90	350
MC50-COB-900-940-40D G1	12.3	1050	4000K	40	90	350
MC50-COB-1400-930-24D G1	12.9	1430	3000K	24	80	350
MC50-COB-1400-930-40D G1	12.9	1360	3000K	40	80	350
MC50-COB-1400-940-24D G1	12.9	1510	4000K	24	80	350
MC50-COB-1400-940-40D G1	12.9	1430	4000K	40	80	350

- Color consistency Mac Adam Step: 3 (<3SDCM)
- High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30


15 DEGREE



24 DEGREE



40 DEGREE



DRIVER OPTIONS:

- OTI / Dali dimmable
- OTE / PhaseCut
- OT / Non dimmable