




## ECTOR UP & DOWN COB - PRO



- FEATURES:**
- Australian designed & manufactured professional low glare accent COB Wall light
  - Extruded aluminium body
  - Fixed
  - Lumen options 980lm up to 1510lm / CRI 80 / CRI 90
  - Integral electronic driver
  - Specify - Non dim / Phase-cut dim / Dali dim
  - Custom version available on request
  - Colour temps available: 2700k / 3000k / 4000k
  - Serviceable IP20 wall light
  - Ideal for commercial / hospitality / retail / gallery / museum / residential applications
  - IES files available on request

**TRIM COLOURS:**

	Black	-2
	White	-3
	Silver	-6
	Custom	-5

- ACCESSORIES:**
- Frosted glass 30mm (FG)
  - Deco colour glass 50mm (DG)
  - Honeycomb filter (AL 20)

40 DEGREE BEAM ANGLE AS PER STANDARD SPEC OPTIONS BELOW.

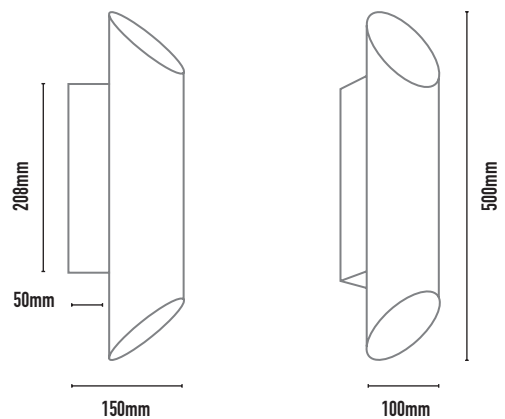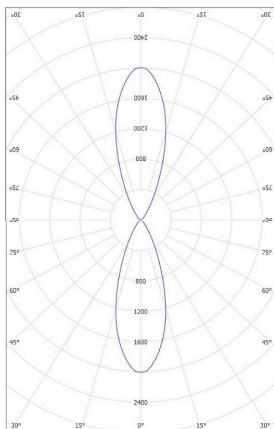

CODE	LAMP TYPE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	mA	DIMENSIONS
ECT50	COB	2 x 12.3	2 x 980	2700K/3000K/4000K	15,24,40	90	350	500mm length x 150mm x 100mm dia


**PROFESSIONAL**

TO SPECIFY ADDITIONAL LED MODULE, "LAMP" OPTIONS: PLEASE SELECT FROM THE CODES BELOW AND ADD TO THE SPECIFICATION


CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	MA
MC50-COB-900-927-15D-G1	12.3	980	2700k	15	90	350
MC50-COB-900-927-24D-G1	12.3	960	2700k	24	90	350
MC50-COB-900-927-40D-G1	12.3	920	2700k	40	90	350
MC50-COB-900-930-15D G1	12.3	1040	3000K	15	90	350
MC50-COB-900-930-24D G1	12.3	1020	3000K	24	90	350
MC50-COB-900-930-40D G1	12.3	980	3000K	40	90	350
MC50-COB-900-940-15D G1	12.3	1120	4000K	15	90	350
MC50-COB-900-940-24D G1	12.3	1090	4000K	24	90	350
MC50-COB-900-940-40D G1	12.3	1050	4000K	40	90	350
MC50-COB-1400-930-24D G1	12.9	1430	3000K	24	80	350
MC50-COB-1400-930-40D G1	12.9	1360	3000K	40	80	350
MC50-COB-1400-940-24D G1	12.9	1510	4000K	24	80	350
MC50-COB-1400-940-40D G1	12.9	1430	4000K	40	80	350

- Color consistency Mac Adam Step: 3 (<3SDCM)
- High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30


**15 DEGREE**

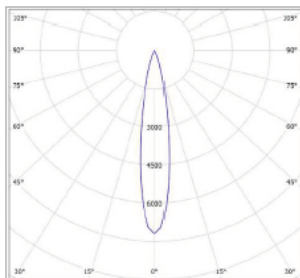

**24 DEGREE**

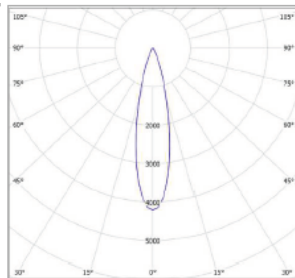

**40 DEGREE**

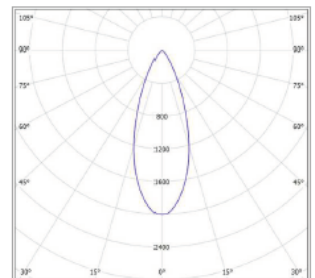

**DRIVER OPTIONS:**

- OTI / Dali dimmable
- OTE / PhaseCut
- OT / Non dimmable