

# CASCADA WALL




- FEATURES:**
- Australian designed & manufactured
  - Recessed wall / step light
  - Aluminium & steel housing
  - Lumen options efficacy of up to 191lm/W
  - High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30
  - Color consistency Mac Adam Step: 3 (<3SDCM)
  - Integral electronic driver- Phase-cut dim/1-10V standard
  - Specify - Dali dim
  - Custom version available on request
  - Colour temps available: 2700k / 3000k / 4000k
  - Serviceable IP20 wall light
  - Ideal for residential / hospitality / retail / gallery / museum / commercial applications
  - IES files available on request

## DRIVER OPTIONS FOR CAS-4 /CAS-5:




- **UNIV20/350FP:** Run 1-3 fittings wired in series/ Non-dim
- **OTE13/350FP:** Run 2-3 fittings wired in series/ Phase-cut dim
- **OTI10/350FP:** Run 1-2 fittings wired in series/ DALI

**COLOURS:**

	Black	-2
	White	-3
	Silver	-6
	Custom	-5

## DRIVER OPTIONS FOR CAS-7:

- **UNIV20/350FP:** Run 1 fitting /Non-dim
- **LCBI10/350FP:** Run 1 fitting/ Phase-cut dim
- **LCA10/350FP:** Run 1 fitting/ DALI

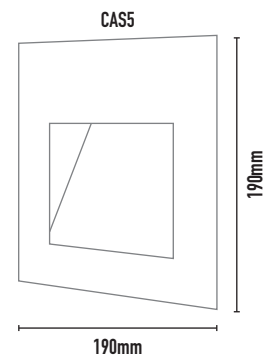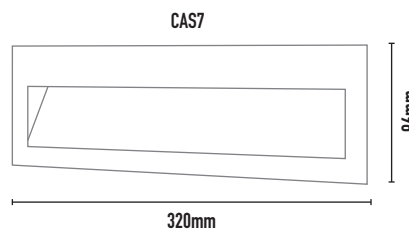

CODE	LAMP TYPE	WATTAGE	LUMENS	COLOUR TEMP	CRI	mA	DIMENSIONS
CAS43	LED	3.9W	705lm	3000k	80	350mA	180x96x59mm (horizontal) - cut out 160x82mm
CAS44	LED	3.9W	754lm	4000k	80	350mA	180x96x59mm (horizontal) - cut out 160x82mm
CAS53	LED	3.9W	705lm	3000k	80	350mA	190x190x65mm (square) - cut out 172x172mm
CAS54	LED	3.9W	754lm	4000k	80	350mA	190x190x65mm (square) - cut out 172x172mm
CAS72	LED	8W	1365lm	2700k	80	350mA	320x96x59mm (horizontal) - cut out 306x82mm
CAS73	LED	8W	1425lm	3000k	80	350mA	320x96x59mm (horizontal) - cut out 306x82mm
CAS74	LED	8W	1495lm	4000k	80	350mA	320x96x59mm (horizontal) - cut out 306x82mm