







TUBBY UP/DOWN PENDANT 111 COB - PRO

- FEATURES:**
- Australian designed & manufactured professional low glare large format accent COB spot light pendant
 - Fixed / Up / Down
 - Requires remote electronic driver
 - Lumen options 1800lm up to 4780lm / CRI 80 / CRI 90
 - Specify Non-dim/ Phase-cut dim / Dali dim / Casambi
 - Dali - Smart phone blue tooth connectivity available on request
 - Dali dim 100% - 0.1% option available on request
 - Casambi Bluetooth wireless mesh control system available on request
 - Standard 2m suspension in fabric flex
 - Serviceable IP20
 - Custom lengths available on request
 - Colour temps available: 2700k / 3000k / 4000k
 - Ideal for commercial / hospitality / retail / gallery / museum / residential applications
 - IES files available on request



COLOURS:

	Black	-2
	White	-3
	White outer / Black inner	-3-2
	Silver	-6
	Custom	-5

- ACCESSORIES:**
- Deco glass filter holder (CHL)
 - Frosted glass 30mm (FG)
 - Deco colour glass 50mm (DG)
 - Honeycomb filter (AL111)
- MOUNTING OPTIONS:**
- CP140 - 140mmØ x 35mm depth C/W internal terminal block
 - CBRD150 - 150mmØ x 55mm depth C/W internal terminal block
 - Custom mounting options on request



2 X 40 DEGREE BEAM ANGLE AS PER STANDARD SPEC OPTIONS BELOW.

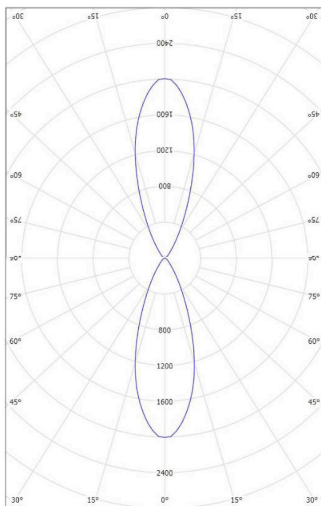

CODE	LAMP TYPE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	mA	DIMENSIONS
TBU62025	COB	2 x 26	2 x 2800	3000K	15,24,40,60	90	500	250mm x 150mm Ø - 2m suspension
TBU62035	COB	2 x 26	2 x 2800	3000K	15,24,40,60	90	500	350mm x 150mm Ø - 2m suspension
TBU62050	COB	2 x 26	2 x 2800	3000K	15,24,40,60	90	500	500mm x 150mm Ø - 2m suspension


PROFESSIONAL

TO SPECIFY ADDITIONAL LED MODULE, "LAMP" OPTIONS: PLEASE SELECT FROM THE CODES BELOW AND ADD TO THE SPECIFICATION


CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	MA
MC111-COB-1800-927-15D-G1	18	1730	2700	15	90	500
MC111-COB-1800-927-24D-G1	18	1770	2700	24	90	500
MC111-COB-1800-927-40D-G1	18	1770	2700	40	90	500
MC111-COB-1800-930-15D-G1	18	1840	3000	15	90	500
MC111-COB-1800-930-24D-G1	18	1880	3000	24	90	500
MC111-COB-1800-930-40D-G1	18	1800	3000	40	90	500
MC111-COB-1800-940-15D-G1	18	1940	4000	15	90	500
MC111-COB-1800-940-24D-G1	18	1990	4000	24	90	500
MC111-COB-1800-940-40D-G1	18	1910	4000	40	80	500
MC111-COB-2800-830-15D-G1	25.9	2700	3000	15	80	700
MC111-COB-2800-830-24D-G1	25.9	2760	3000	24	80	700
MC111-COB-2800-830-40D-G1	25.9	2650	3000	40	80	700
MC111-COB-2800-840-15D-G1	25.9	2830	4000	15	80	700
MC111-COB-2800-840-24D-G1	25.9	2900	4000	24	80	700
MC111-COB-2800-840-40D-G1	25.9	2780	4000	40	80	700
MC111-COB-4300-830-24D-G1	37.6	4550	3000	24	80	1050
MC111-COB-4300-830-40D-G1	37.6	4340	3000	40	80	1050
MC111-COB-4300-830-60D-G1	37.6	4240	3000	60	80	1050
MC111-COB-4300-840-24D-G1	37.6	4780	4000	24	80	1050
MC111-COB-4300-840-40D-G1	37.6	4560	4000	40	80	1050
MC111-COB-4300-840-60D-G1	37.6	4450	4000	60	80	1050

- Color consistency Mac Adam Step: 3 (<3SDCM)
- High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30


15 DEGREE



24 DEGREE



40 DEGREE



DRIVER OPTIONS:

- OTI / Dali dimmable
- OTE / PhaseCut
- OT / Non dimmable