





TUBBY UP/DOWN PENDANT COB - PRO

- FEATURES:**
- Australian designed & manufactured professional low glare accent COB spot light pendant
 - Fixed / Up / Down
 - Requires remote electronic driver
 - Lumen options 980lm up to 1510lm / CRI 80 / CRI 90
 - Specify Non-dim/ Phase-cut dim / Dali dim / Casambi
 - Dali - Smart phone Bluetooth connectivity available on request
 - Dali dim 100% - 0.1% option available on request
 - Casambi Bluetooth wireless mesh control system available on request
 - Standard 2m suspension in fabric flex
 - Serviceable IP20
 - Custom lengths available on request
 - Colour temps available: 2700k / 3000k / 4000k
 - Ideal for commercial / hospitality / retail / gallery / museum / residential applications
 - IES files available on request


COLOURS:

	Black	-2
	White	-3
	White outer / Black inner	-3-2
	Silver	-6
	Custom	-5

2 X 40 DEGREE BEAM ANGLE AS PER STANDARD SPEC OPTIONS BELOW.

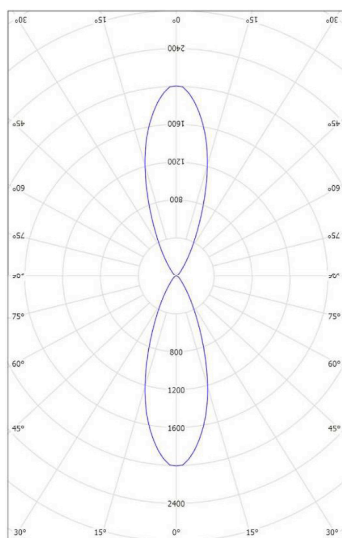

- ACCESSORIES:**
- Deco glass filter holder (CHL)
 - Frosted glass 30mm (FG)
 - Deco colour glass 50mm (DG)
 - Honeycomb filter (AL 20)
- MOUNTING OPTIONS:**
- CP140 - 140mmØ x 25mm depth
C/W internal terminal block
 - CBRD150 - 150mmØ x 55mm depth
C/W internal terminal block
 - Custom mounting options on request



CODE	LAMP TYPE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	mA	DIMENSIONS
TBU50025	COB	2 x 12.3	2 x 980	3000K	15,24,40	90	350	250mm x 150mm Ø - 2m suspension
TBU50035	COB	2 x 12.3	2 x 980	3000K	15,24,40	90	350	350mm x 150mm Ø - 2m suspension
TBU50050	COB	2 x 12.3	2 x 980	3000K	15,24,40	90	350	500mm x 150mm Ø - 2m suspension


PROFESSIONAL

TO SPECIFY ADDITIONAL LED MODULE, "LAMP" OPTIONS: PLEASE SELECT FROM THE CODES BELOW AND ADD TO THE SPECIFICATION


CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	MA
MC50-COB-900-927-15D-G1	12.3	980	2700k	15	90	350
MC50-COB-900-927-24D-G1	12.3	960	2700k	24	90	350
MC50-COB-900-927-40D-G1	12.3	920	2700k	40	90	350
MC50-COB-900-930-15D G1	12.3	1040	3000K	15	90	350
MC50-COB-900-930-24D G1	12.3	1020	3000K	24	90	350
MC50-COB-900-930-40D G1	12.3	980	3000K	40	90	350
MC50-COB-900-940-15D G1	12.3	1120	4000K	15	90	350
MC50-COB-900-940-24D G1	12.3	1090	4000K	24	90	350
MC50-COB-900-940-40D G1	12.3	1050	4000K	40	90	350
MC50-COB-1400-930-24D G1	12.9	1430	3000K	24	80	350
MC50-COB-1400-930-40D G1	12.9	1360	3000K	40	80	350
MC50-COB-1400-940-24D G1	12.9	1510	4000K	24	80	350
MC50-COB-1400-940-40D G1	12.9	1430	4000K	40	80	350

- Color consistency Mac Adam Step: 3 (<3SDCM)
- High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30


15 DEGREE



24 DEGREE



40 DEGREE



DRIVER OPTIONS:

- OTI / Dali dimmable
- OTE / PhaseCut
- OT / Non dimmable