


OPAL RECESSED CEILING LED STRIP


- FEATURES:**
- Aluminium extrusion profile is designed for flexible LED Strip for ceiling and wall application
 - High lumen LED strip
 - Low profile extrusion with opal diffuser
 - Shortpitch LED strip offers uniform illumination
 - Requires remote electronic 24v driver
 - Specify - Non dim/ Phase-cut dim / Dali dim
 - Colour consistency ≤ 3 SCDM
 - CRI 90
 - Tuneable white RGB on request
 - NON Dim
 - Phase-cut
 - 0-10v
 - Dali dim 100% - 0.1% option available on request
 - Casambi bluetooth wireless mesh control system available on request
 - Colour temps available: 2700k/3000k/4000k
 - Ideal for cove lighting, Ceiling, wall integration and display lighting
 - Ideal for commercial / residential / hospitality / retail / gallery / museum applications

TRIM COLOURS: Anodised silver

CODE	COLOUR TEMP	CRI	V/DC	WATTAGE/m	LUMENS/m	OPERABLE LENGTH	BEAM ANGLE
MSCLLE-LED-27-1m-27k	2700K	90	24	21W	2400	5m	120°
MSCLLE-LED-27-1m-3k	3000K	90	24	21W	2500	5m	120°
MSCLLE-LED-27-1m-4k	4000K	90	24	21W	2500	5m	120°

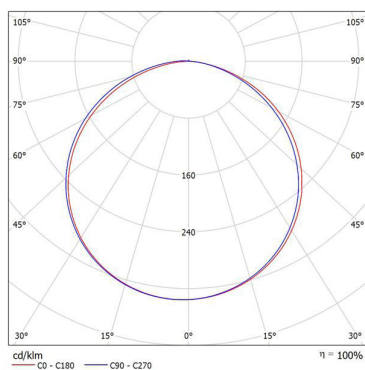

RECESSED CEILING EXTRUSION



CODE

LEDPRO-RE 1m

LEDPRO-RE 2m

LEDPRO-RE 3m