

BLADE TRACK FLOOD



- FEATURES:**
- Australian designed & manufactured professional low glare track flood light
 - Extruded aluminium body
 - Beam angle standard 60°
 - Beam options 90° and Asymmetrical
 - Adjustable 90° tilt
 - Lumen options efficacy of up to 202lm/W
 - High color rendering performance, CRI 80 and 90 (TM30 compliant) IES TM30
 - Color consistency Mac Adam Step: 3 (<3SDCM)
 - Integral electronic track driver - Non dim (standard)
 - Specify - Dali dim / Casambi
 - Custom version available on request
 - Colour temps available: 2700/ 3000k / 4000k
 - Serviceable IP20 wall light
 - Ideal for commercial / retail / gallery / museum / residential applications
 - IES files available on request

- COLOURS:**
- Black -2
 - White -3
 - Silver -6
 - Custom -9

- MOUNTING OPTIONS:**
- Standard - CD65 C/W mouse trap springs
 - Custom - CDCS65 flat disk with 2x counter sunk screw fixings.



60 DEGREE

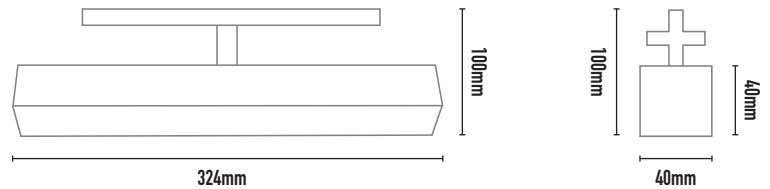

CODE	LAMP TYPE	WATTAGE	LUMENS	COLOUR TEMP	BEAM°	CRI	mA	DIMENSIONS
BFL326	LED	10.6W	1521lm	2700K	60°	80	450	324mm length x 40mm x 40mm height x 100mm
BFL336	LED	10.6W	1591lm	3000K	60°	80	450	324mm length x 40mm x 40mm height x 100mm
BFL346	LED	10.6W	1673lm	4000K	60°	80	450	324mm length x 40mm x 40mm height x 100mm