




PHOEBE LED PENDANT UP & DOWN

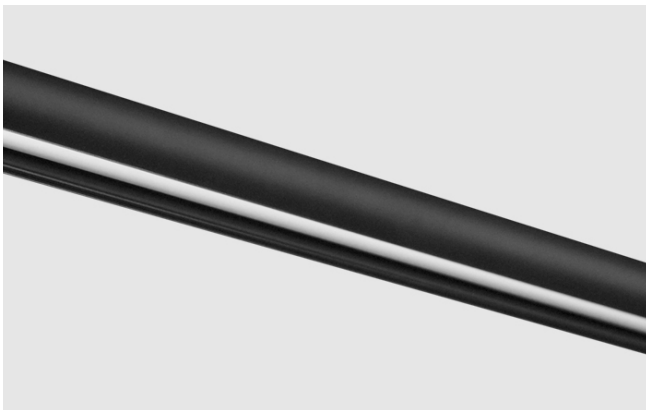

- FEATURES:**
- Australian designed & manufactured professional low glare, up /down pendant
 - Linear LED pendant lighting system
 - Extruded aluminium profile
 - Fixed beam angle 140°
 - Higher lumen options available on request
 - (Mac Adam 3), CRI 90
 - No external power cable required (low voltage power runs down suspension wires)
 - A single power cable is required to run back to one end within the ceiling cavity
 - External power cable one end available on request for solid ceilings
 - Surface mounted driver box available on request for solid ceilings
 - Additional suspension cable required for pendants over 2m in length
 - Remote 24v constant voltage driver
 - Non dim standard or specify - Phase-cut, 0-10v, Dali dim, Casambi on request
 - Custom options available on request
 - Custom lengths available from 1m to 9m
 - Serviceable IP20 pendant
 - Available in various colour temperatures 2700k, 3000k,4000k
 - Ideal for residential, hospitality and commercial applications
 - IES files available on request

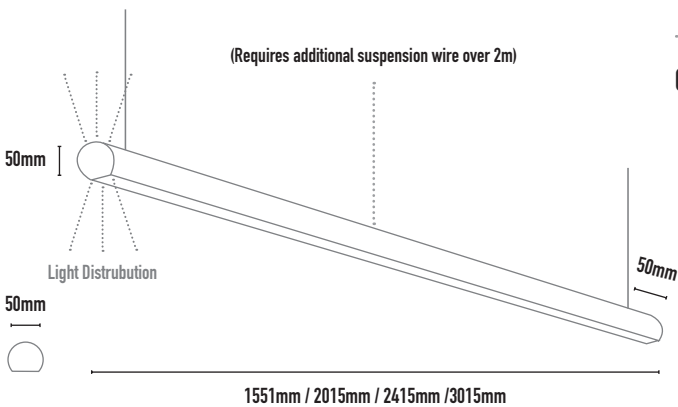

- COLOURS:**
- Black -2
 - White -3
 - Silver -6
 - Bronze -7

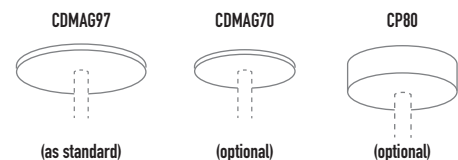

CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	DIMENSIONS
PHU1515	65W	6755lm	3000K / 4000K	140	90	1515mm x 50mm x 50mm - 3000mm drop (max)
PHU2015	80W	8840lm	3000K / 4000K	140	90	2015mm x 50mm x 50mm - 3000mm drop (max)
PHU2515	110W	11,100lm	3000K / 4000K	140	90	2515mm x 50mm x 50mm - 3000mm drop (max)
PHU3015	122W	13,340lm	3000K / 4000K	140	90	3015mm x 50mm x 50mm - 3000mm drop (max)