

# MONDO LINEAL 60





**FEATURES:**

- Australian designed & manufactured professional low glare, linear pendant system
- Down only
- Up and down version available on request
- Linear LED pendant lighting system, surface mounted and recessed options available
- Extruded aluminium profile
- Fixed beam angle 120°
- Diffuser\* ICE high transmission
- Higher lumen options available on request (Mac Adam 3), CRI 90
- Additional suspension cable required for pendants over 2m in length
- Integral driver
- Non dim standard or specify Dali, Touch Dim, DSI, 1V-10V or Casambi blue tooth mesh system
- Input voltage 220v-240v AC/50Hz-60Hz
- Custom options available on request
- Lengths made to order from 1m to 9m Nom
- Serviceable IP20 pendant
- Available in various colour temperatures 3000k,4000k on request 2700k
- Ideal for commercial applications
- IES files available on request

**COLOURS:**

- Black -2
- White -3
- Silver -6
- Anodised aluminium
- Custom

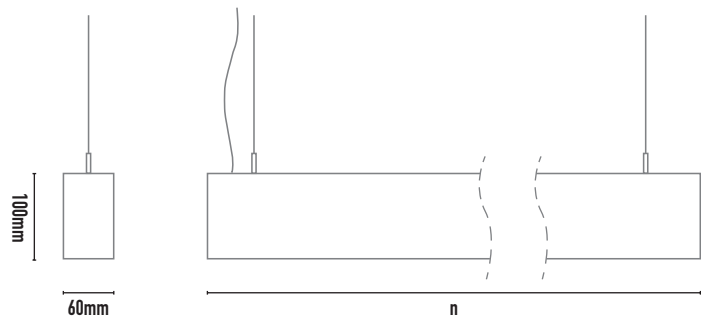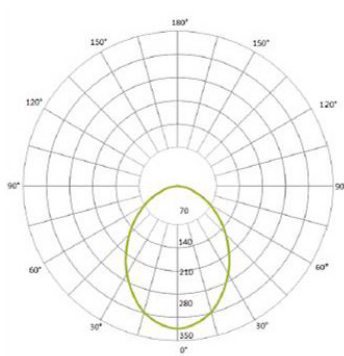

CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	DIMENSIONS
MLP25	25W/m	2259lm	3000K / 4000K	120	90	Length / Nom - 60mm x 100mm height / drop 2m
MLP33	33W/m	3000lm	3000K / 4000K	120	90	Length / Nom - 60mm x 100mm height / drop 2m
MLP37	37W/m	3500lm	3000K / 4000K	120	90	Length / Nom - 60mm x 100mm height / drop 2m