



## MONDO LINEAL PENDANT 60

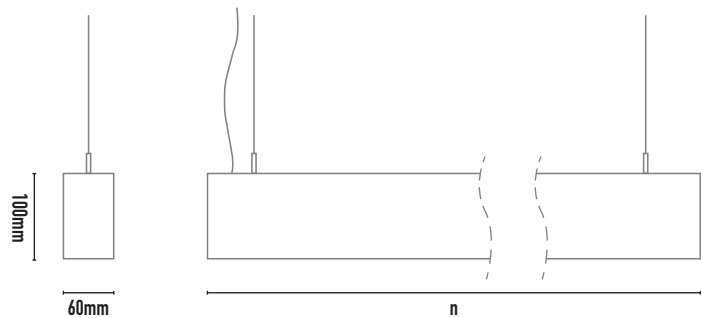

- FEATURES:**
- Australian designed & manufactured professional low glare, linear pendant system
  - Down only
  - Up and down version available on request
  - Linear LED pendant lighting system, surface mounted and recessed options available
  - Extruded aluminium profile
  - Fixed beam angle 120°
  - Diffuser\* ICE high transmission
  - Higher lumen options available on request (Mac Adam 3), CRI 90
  - Additional suspension cable required for pendants over 2m in length
  - Integral driver
  - Non dim standard or specify Dali, Touch Dim, DSI, 1V-10V or Casambi blue tooth mesh system
  - Input voltage 220v-240v AC/50Hz-60Hz
  - Custom options available on request
  - Lengths made to order from 1m to 9m Nom
  - Serviceable IP20 pendant
  - Available in various colour temperatures 3000k,4000k on request 2700k
  - Ideal for commercial applications
  - IES files available on request

- COLOURS:**
- Black -2
  - White -3
  - Silver -6
  - Anodised aluminium
  - Custom

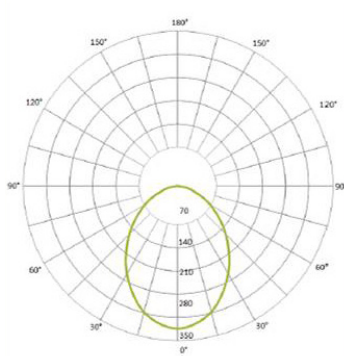

CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	DIMENSIONS
MLP25	25W/m	2259lm	3000K / 4000K	120	90	Length / Nom - 60mm x 100mm height / drop 2m
MLP33	33W/m	3000lm	3000K / 4000K	120	90	Length / Nom - 60mm x 100mm height / drop 2m
MLP37	37W/m	3500lm	3000K / 4000K	120	90	Length / Nom - 60mm x 100mm height / drop 2m