



MONDO LINEAL SURFACE 60

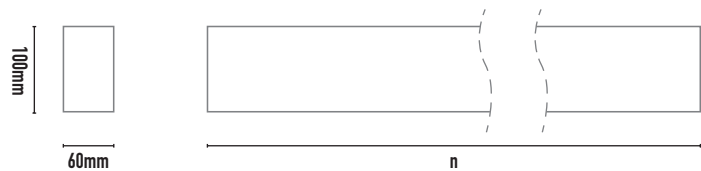

- FEATURES:**
- Australian designed & manufactured professional low glare, linear surface mounted system
 - Down only
 - Linear LED surface mounted lighting system, pendant and recessed options available
 - Extruded aluminium profile
 - Fixed beam angle 120°
 - Diffuser* ICE high transmission
 - Higher lumen options available on request
 - (Mac Adam 3), CRI 90
 - Integral driver
 - Non dim standard or specify Dali, Touch Dim, DSI, 1V-10V or Casambi blue tooth mesh system
 - Input voltage 220v-240v AC/50Hz-60Hz
 - Custom options available on request
 - Lengths made to order from 1m to 9m Nom
 - Serviceable IP20 pendant
 - Available in various colour temperatures 3000k,4000k on request 2700k
 - Ideal for commercial applications
 - IES files available on request

- COLOURS:**
- Black -2
 - White -3
 - Silver -6
 - Anodised aluminium
 - Custom

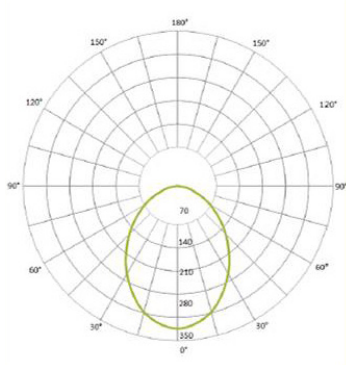

CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	DIMENSIONS
MLS25	25W/m	2259lm	3000K / 4000K	120	90	Length / Nom - 60mm x 100mm height
MLS33	33W/m	3000lm	3000K / 4000K	120	90	Length / Nom - 60mm x 100mm height
MLS37	37W/m	3500lm	3000K / 4000K	120	90	Length / Nom - 60mm x 100mm height