


**TULLY GU10 SURFACE DOWNLIGHT**

**FEATURES:**

- Australian designed & manufactured surface mounted low glare downlight
- Powdercoated steel body
- Suitable for concrete slab mounting, solid or plasterboard ceilings, with option for side conduit entry or top cable entry
- GU10 Dimmable replaceable lamp in varying wattages, colour temperatures and beam spreads
- Colour temperature available: 2700K/3000K/4000K
- No remote driver required
- Also available in track and adjustable surface mount <https://massonforlight.com.au/products/interior/track-systems/round-square-mounting-options/>
- Mitred Snoot available on request minimum height 140mm
- Serviceable IP20 downlight
- Ideal for commercial/hospitality/retail/gallery/museum/residential applications
- IES files available on request

**ACCESSORIES**

- Deco glass filter holder (CHL)
- Frosted glass 50mm (FG)
- Deco colour glass 50mm (DG)
- Honeycomb filter (AL20)

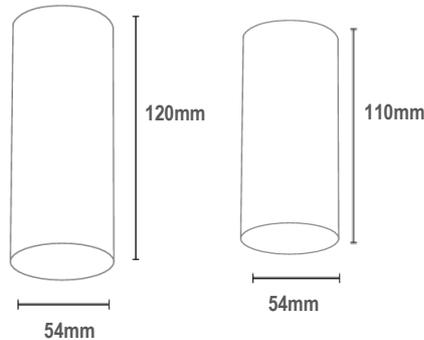

**COLOURS:**

- Black [-2]
- White [-3]
- Silver [-6]
- Bronze [-7]
- Brass [-9]
- Custom

CODE	WATTAGE	LUMENS	COLOUR TEMP	BEAM ANGLE	CRI	DIMENSIONS
TULSM	4 – 7.5W	400 – 900LM	2700K/3000K/4000K	20, 35, 60	85 – 90	110mm x 54mm 120mm x 54mm