






# ROMAN 3 SPOKE PENDANT

**FEATURES:**

- Australian designed & manufactured professional low glare, down only pendant
- Linear LED pendant lighting system, surface mounted and wall options available on request.
- Extruded aluminium profile
- Fixed beam angle 140
- Lumens options efficacy of up to 120lm/W less diffuser
- Higher lumen options available on request.
- MacAdam Step 3 (23SDCIM), CRI 90
- Available in various colour temperatures 2700k, 3000k, 4000k,
- Specify - Tunable white, RGB options available on request
- Remote 24v driver
- Phase-cut dim standard.
- Specify - Dali dim available on request
- Specify - Casambi bluetooth wireless mesh control system available on request
- Large pendant required x3 suspension wires
- Serviceable IP20 pendant
- Ideal for residential/ hospitality and commercial applications
- IES files available on request

**COLOURS:**


-  Black -2
-  White -3
-  Silver -6
-  Brass -tbc
-  Bronze -tbc
- Custom -5

**DRIVER OPTIONS:**

- **Phase-cut dim:** PDV24 -075- 75W
- **Dali:** LCA35/24v - 35W

**ACCESSORIES:**

- Black mesh (note light loss factor 50%)
- Rod suspension /300mm/600mm/900mm custom lengths

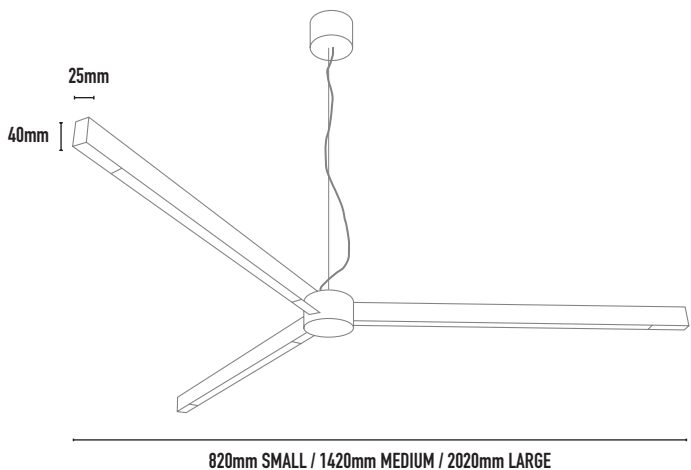

CODE	LAMP TYPE	WATTAGE	LUMENS	COLOUR TEMP	BEAM°	CRI	mA	DIMENSIONS
RSP3	LED	16W	1330lm	2700K	140°	90	350	820mm Ø x 25mmx 40mm 2000mm drop (max)
RSP6	LED	39W	3334lm	2700K	140°	90	350	1420mm Ø x 25mmx 40mm 2000mm drop (max)
RSP9	LED	62W	5930lm	2700K	140°	90	350	2020mm Ø x 25mmx 40mm 2000mm drop (max)