


LYRA FLOODLIGHT

- FEATURES:**
- Australian designed & manufactured professional 3C track flood
 - Extruded aluminium body
 - Beam angle / fixed 180°
 - Lumen options efficacy of up to 191lm/W
 - High color rendering performance, 90 (TM30 compliant) IES TM30
 - Color consistency Mac Adam Step: 3 (<3SDCM)
 - Integral electronic driver- Phase-cut dim/1-10V standard
 - Specify - Dali dim
 - Custom version available on request
 - Colour temps available: 2700 / 3000k / 4000k
 - Serviceable IP20 track floodlight
 - Ideal for gallery / museum / retail & commercial applications
 - IES files available on request

- COLOURS:**
- Black -2
 - White -3
 - Custom -5

- ACCESSORIES:**
- Code: LYFCC012 – 190 up/down glare guard
 - Code: LYFCC0032 – 320 up/down glare guard

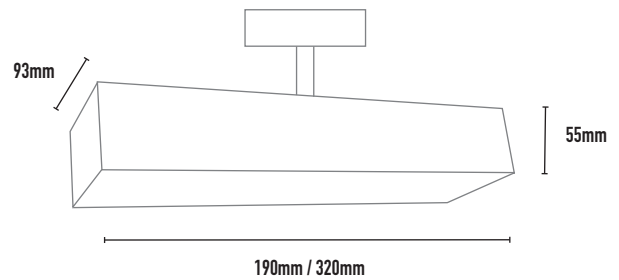

CODE	LAMP TYPE	WATTAGE	LUMENS	COLOUR TEMP	BEAM°	CRI	mA	DIMENSIONS
LYF1323	LED	8W	1280lm	3000K	180	90	350	190mm length x 93mm width x 55mm depth
LYF3323	LED	15.6W	2560lm	3000K	180	90	350	320mm length x 93mm width x 55mm depth